



DATE	
PROJECT	
TYPE	
NOTE	
PREPARED BY	

CLP-ACRN

CLP-ACRN Induction Exterior Post Top Fixture



- Lamp Rating: 100,000 Hours for enhanced safety and maintenance
- Lumen Maintenance: 88% maintained lumens over 100,000 Hours
- Energy Savings: Over 57% savings comparing to HPS and other HID sources
- IP Rating: IP55, UL listed for wet location
- Light Output: 5000K, 90 CRI
- Voltage: 120-277v standard, 480 optional
- Applications: Walkways, Parks, Security, Perimeter Lighting
- Warranty: 10 year warranty (see terms and conditions)
- Construction: Heavy duty die cast aluminum base, Formed Clear Prismatic Acrylic lens

Lamp Specifications

Wattage	Lumens	CRI	CCT(KELVIN)	Rated Life
CLP-ACRN-23IND	2185	90	5000K	100,000 HRS
CLP-ACRN-40IND	3,800	90	5000K	100,000 HRS


Ballast Specifications

System Wattage	Input Voltage	Input Current	Input Frequency	Power Factor	Ambient Temp	THD
27W	120-277VAC	0.38-0.17A	233KHz	.99	-31°F- 239°F	<10%
44W	120-277VAC	0.48-0.29A	233KHz	.99	-31°F- 239°F	<10%

Ordering Guide

Example: (CLP-ACRN-40IND-50-120/277V-BZ-PC)

CLP-ACRN						
MODEL	WATTS	COLOR TEMP	VOLTAGE	MOUNTING	FINISH	OPTIONS
CLP-ACRN POST TOP	23W-23IND 40W-40IND	27-2700K 35-3500K 41-4100K 47-4700K 50-5000K 60-6000K	120-277V 480V	POLE MOUNT	BLK-BLACK BZ-BRONZE CUS-CUSTOM	DIM- DIMMING

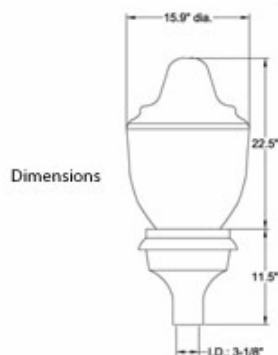

*No lumen loss if temperatures are between rated ambient
*IC technology generator for power surge & spikes

All our products are proudly manufactured and or assembled in USA and we are proud to announce that we are "BUY AMERICAN" compliant.