


FloodPak Series FPL

Featuring Philips LifeLED™ Technology



ORDERING INFORMATION

Catalog Number: Example: FPL08UB0546KH2

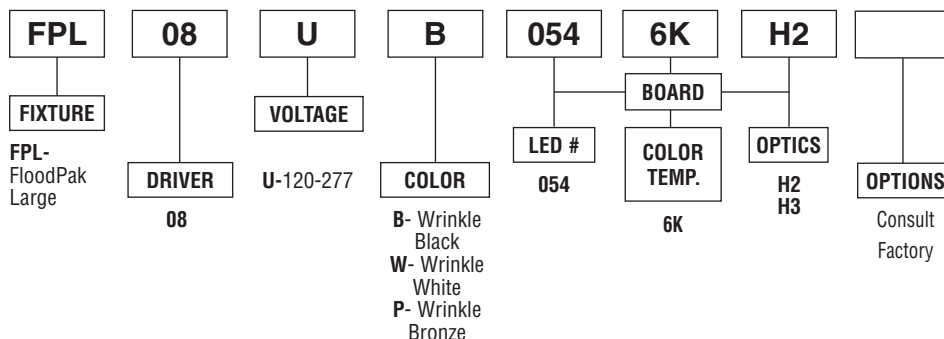

NOTE: Not for use in car washes.

ACCESSORIES

FPLKNUCKLE - Adjustable 2" Tenon Slipfitter.

FPLARM - Shoebox Arm. Converts FloodPak to pole-mount (minimum 4" square pole).

FPLRPA - Round pole adapter.




UL Wet Location Listed.

PRODUCT SPECIFICATIONS

- The FloodPak is a perfect blend of architectural design and performance.
- Functions in environments with temperatures that range from -30°C to 40°C.
- The FloodPak can be surface mounted in various positions. Use it as a cut-off wallpack or tip it up 22.5° for forward throw with semi-cut-off.
- The FloodPak can also be pole mounted or ground mounted using mounting accessories.
- Precision die cast aluminum construction. All exposed hardware is stainless steel.
- Fully tempered soda lime glass lens.
- Duraplex II wrinkle bronze polyester powder finish is standard but the FloodPak is available in a variety of designer colors (consult factory).
- Electronic Class II LED driver accepts 120-277v, 50/60hz input (constant current).
- High-output LEDs.
- Individual precision optics collect and redirect light to optimize performance.
- Patented LifeLED™ Optical System individually controls the placement of light in the target area minimizing glare.
- LEDs have an average rated life of 60,000 hours.
- Integral cast aluminum heat sink ensures cool operation.
- UL wet location listed.
- Complete with a UL approved mounting box rated for 90°C supply wire with integral bubble level.
- Meets IESNA cut-off requirements.
- Contractor Friendly design with integral cable permitting easy, hands free wiring.


PHOTOMETRICS

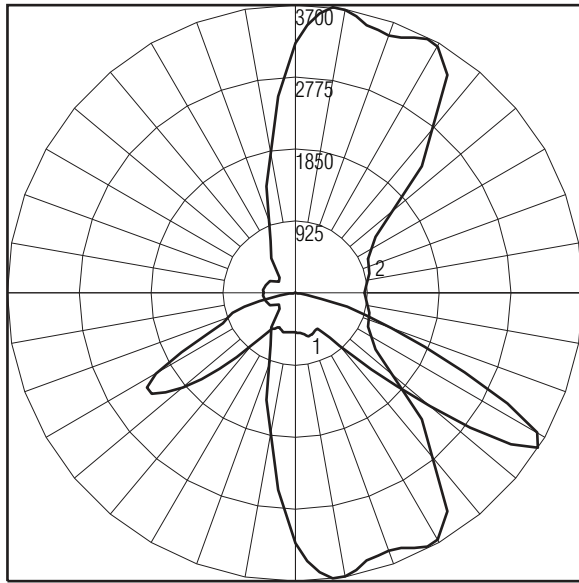

FLOODPAK LED WALL LUMINAIRE - TYPE II
WITH INDIVIDUAL LED LENS OPTICS AND CLEAR FLAT GLASS LENS
54 WHITE LEDS. LUMEN OUTPUT = 4052 LMS.

Characteristics

IES Classification	Type II
Longitudinal Classification	Short
Cutoff Classification (deprecated)	Full Cutoff
Total Rated Lamp Lumens	4052
Maximum Candela	3700
Maximum Candela Angle	82.5H 57.5V
Maximum Candela At 90 Degrees Vertical	0 (0.0% Lamp Lms)
Maximum Candela from 80 to <90 Degrees Vertical	366 (9.0% Lamp Lms)
Downward Total Efficiency	100.5%
Total Luminaire Watts	97
Ballast Factor	1.00

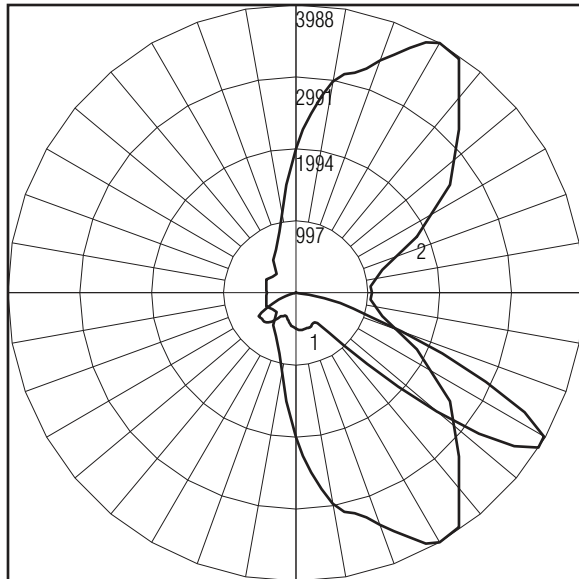

FLOODPAK LED WALL MOUNT LUMINAIRE - TYPE 3
WITH INDIVIDUAL LED LENS OPTICS AND CLEAR FLAT GLASS LENS
54 WHITE LEDS. LUMEN OUTPUT = 4112 LMS.

Characteristics

IES Classification	Type III
Longitudinal Classification	Short
Cutoff Classification (deprecated)	Semi-Cutoff
Total Rated Lamp Lumens	4112
Maximum Candela	3988
Maximum Candela Angle	60H 57.5V
Maximum Candela At 90 Degrees Vertical	0 (0.0% Lamp Lms)
Maximum Candela from 80 to <90 Degrees Vertical	412 (10.0% Lamp Lms)
Downward Total Efficiency	100.6%
Total Luminaire Watts	97
Ballast Factor	1.00

MOUNTING OPTIONS



0° Down



22.5° Down